


Installation instruction and use

Removable table kit with LH

PART NUMBER: RTS C LH, RTS C LHX.

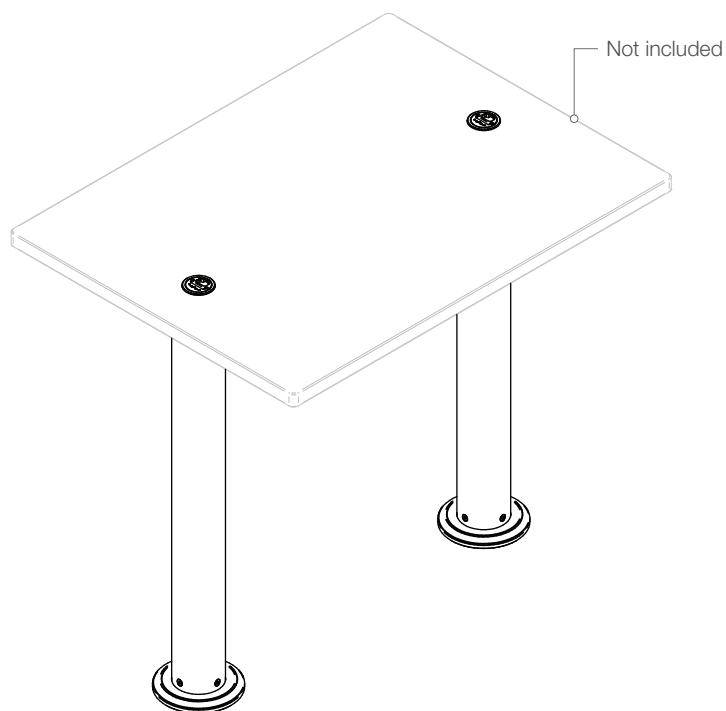

CAUTION. Read all instructions carefully before installing and using this product.

1. REQUIRED FOR INSTALLATION.



Hole saw



Non acidic degreaser



Threadlocker



Polyurethane marine sealant



Anti-corrosion lubricant



Wrenches



hexagonal key

Installation instruction and use


Removable table kit with LH

1. ARRANGEMENT.

Mark the hole, and use a hole saw to cut hole for the deck base



	T min	T max
Ø 32 mm	10 mm	44 mm

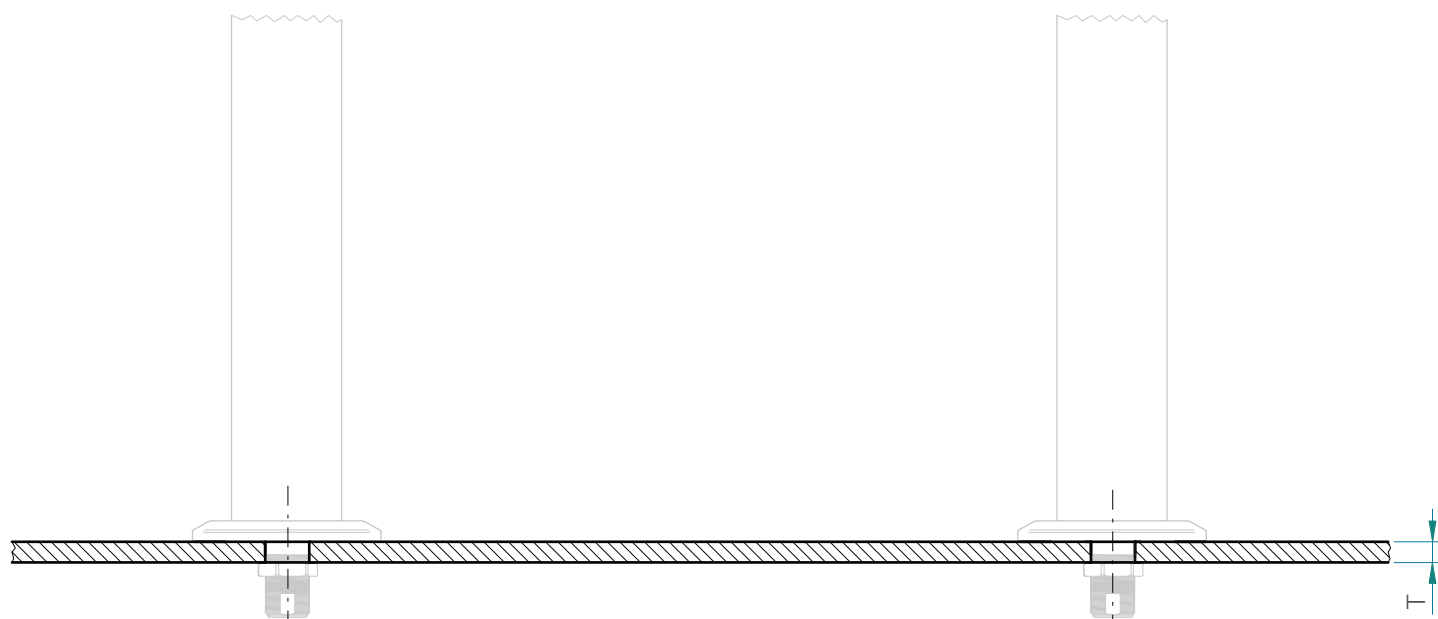



Installation instruction and use

Removable table kit with LH


2. ASSEMBLY.

Carefully clean the base of the BP20X with a non-acidic degreaser. Then apply a small bead of marine sealant.

Apply some anti-corrosion lubricant into the drilled hole, and some threadlocker to the thread.

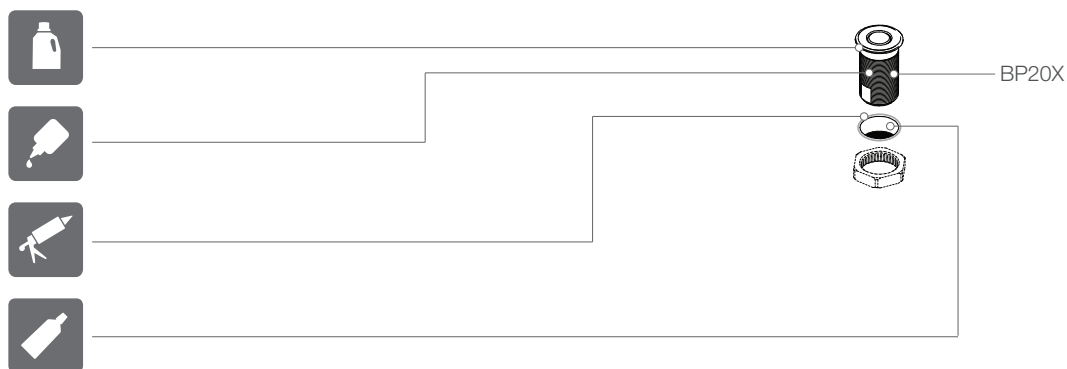

Insert the BP20X inside the hole, and screw the nut with the wrench.
Remove the excess of marine sealant on the top.

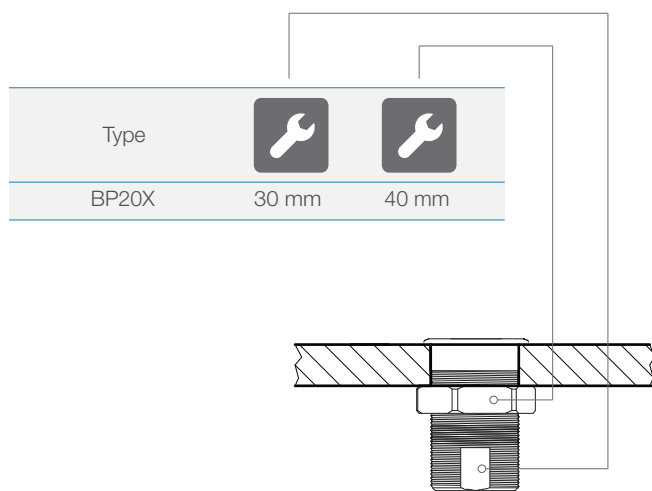

Type		
BP20X	30 mm	40 mm








Installation instruction and use

Removable table kit with LH

3. LEGS.

Place the carbon pedestal on the deck socket, gently push and turn clockwise to screw the leg into the socket. Tighten it firmly.

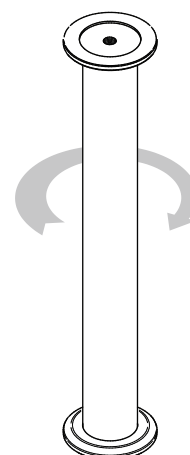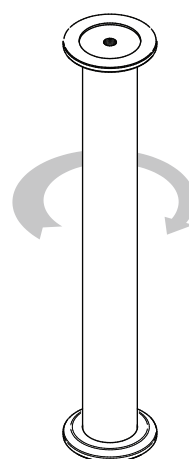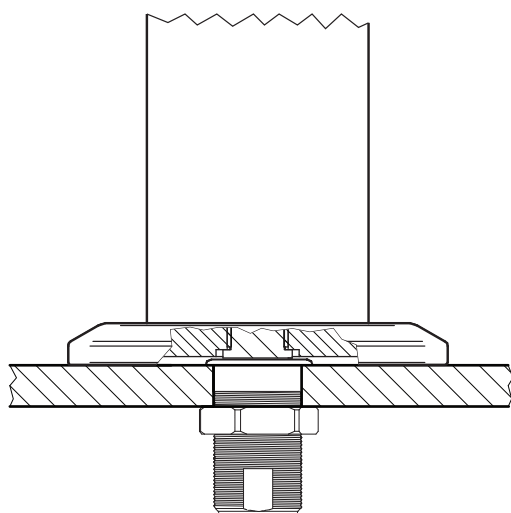


Installation instruction and use

Removable table kit with LH

4. LH50 INSTALLATION ON TABLE TOP.

Drill the holes Ø 45 mm for the LH50 / LH50X,
and install them with an 3 mm hexagonal key.

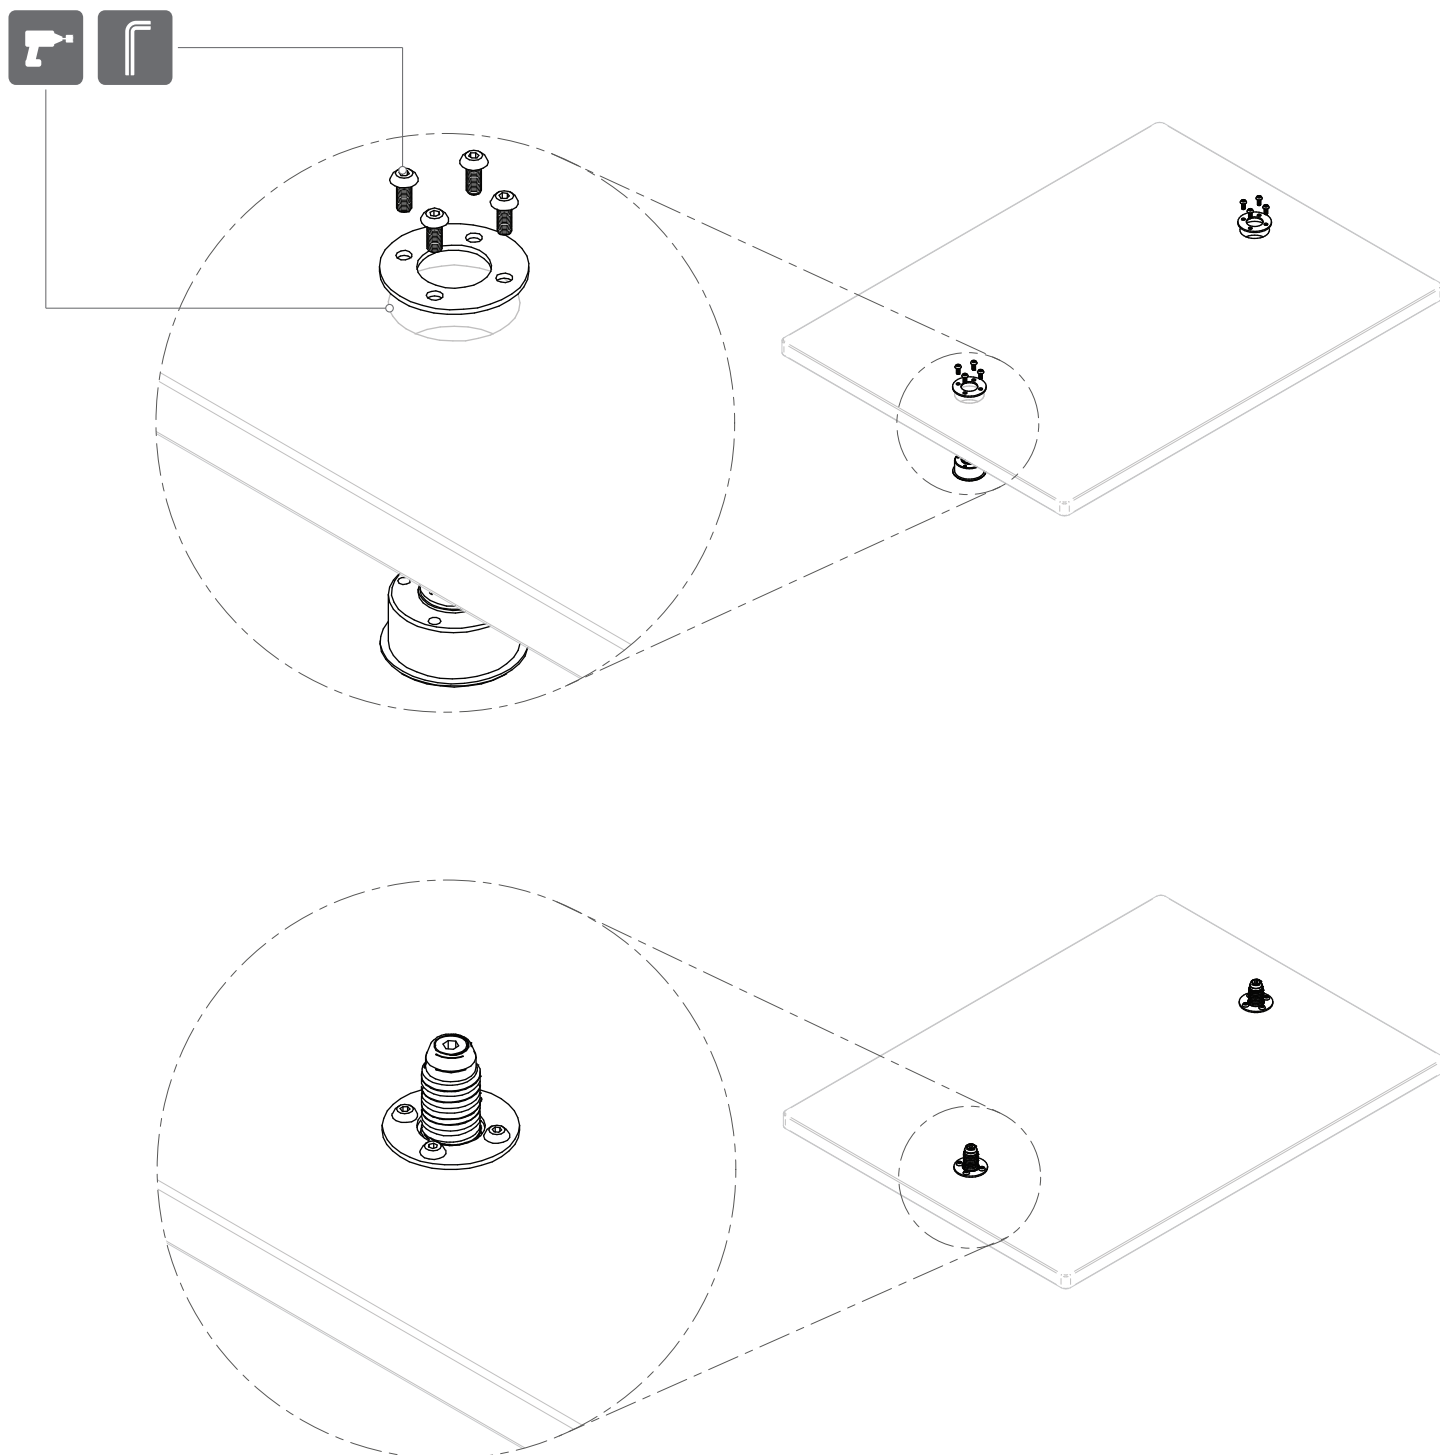

Installation instruction and use

Removable table kit with LH

5 TABLE TOP INSTALLATION

