Maintenance

Flush cleat. Aluminium / Stainless steel

Flush cleat: FD200, FD240, FD340, FD400, FD200X, FD240X, FD340X, FD400X.

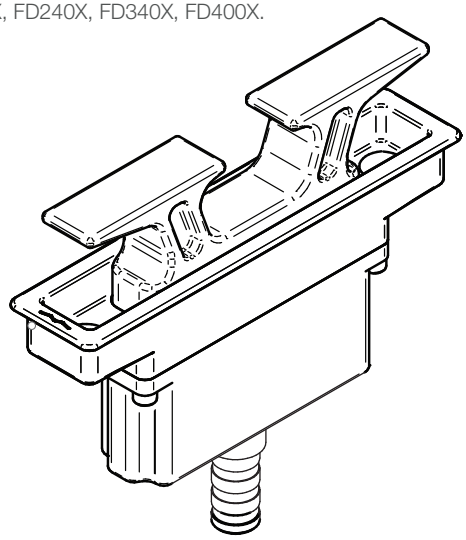

Clean with direct fresh water. When using soap, be sure to use mild dishwashing liquid and to rinse thoroughly.

TO DO EVERY WEEK !

Fresh water › Soap › Fresh water

Grease regularly the lifting parts with silicone grease.
Don't use other types of lubricants, they may damage the anodization and the O-rings.
Never use abrasive cleaning products.
Never use steel or brass wool, polishing wheels or polishing compounds.

TO DO EVERY 6 MONTHS !
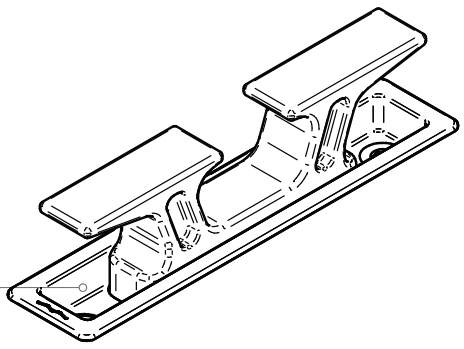
Silicone grease